

## DESC1065W


### 10.0AMPS.SIC SCHOTTKY BARRIER DIODE

**FEATURE**

- . 650V Schottky Diode
- . Zero Reverse Recovery/Zero Forward Recovery
- . High Efficiency Operation
- . Extremely Fast Switching
- . Temperature Independent Switching Behavior

**TYPICAL APPLICATIONS**

- . Switch mode power supply
- . Power factor correction Solar Invertor
- . Solar inverter
- . Uninterruptible power supply

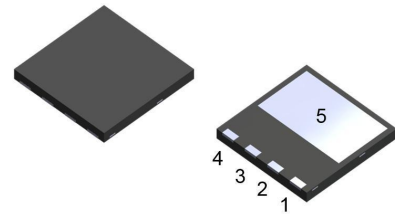
**DFN8\*8**

**MAXIMUM RATINGS** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	DESC1065W	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	650	V
Maximum RMS Voltage	$V_{RMS}$	455	V
Maximum DC blocking Voltage	$V_{DC}$	650	V
Maximum Average Forward Rectified Current at $T_C = 150^\circ\text{C}$	$I_{F(AV)}$	10	A
Non-Repetitive Peak Forward Surge Current $T_c=25^\circ\text{C}, t_p=8.3 \text{ ms}, \text{ Half Sine Pulse}$	$I_{FSM}$	86	A
Total power dissipation $T_c=25^\circ\text{C}$	$P_D$	51.7	W
Operation Junction Temperature and Storage Temperature	$T_J, T_{STG}$	-55 to +175	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Typ	Max	Units	
Forward voltage	$V_F$	$I_F=10\text{A}, T_j=25^\circ\text{C}$	1.27	1.5	V
		$I_F=10\text{A}, T_j=175^\circ\text{C}$	1.38	1.6	
		$I_F=2\text{A}, T_j=25^\circ\text{C}$	0.99	---	
Reverse current	$I_R$	$V_R=650\text{V}, T_j=25^\circ\text{C}$	6	50	$\mu\text{A}$
		$V_R=650\text{V}, T_j=175^\circ\text{C}$	25	200	
Total capacitive charge	$Q_c$	25	---	nC	
Total capacitance	$C$	$V_R=0\text{V}, T_j=25^\circ\text{C}, f=1\text{MHZ}$	640	---	pF
		$V_R=200\text{V}, T_j=25^\circ\text{C}, f=1\text{MHZ}$	66	---	
		$V_R=400\text{V}, T_j=25^\circ\text{C}, f=1\text{MHZ}$	48	---	

**THERMAL CHARACTERISTICS** ( $T_C=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Typ	Max	Units
Typical Thermal Resistance Junction to Case	$R_{(JC)}$	2.9	---	$^\circ\text{C}/\text{W}$

RATING AND CHARACTERISTIC CURVES

FIG.1-FORWARD CHARACTERISTICS

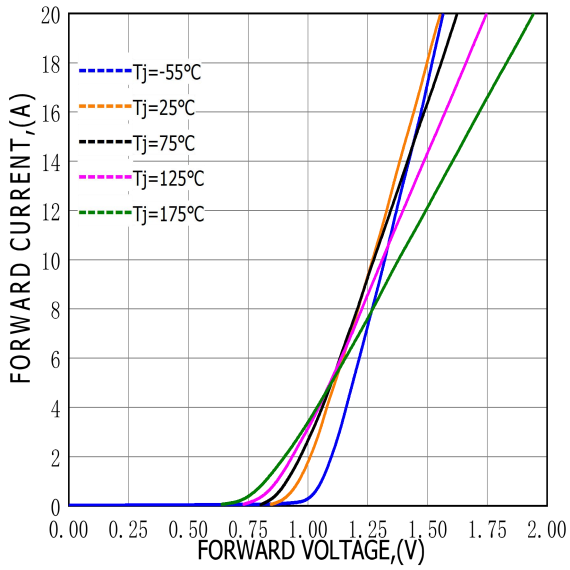


FIG.2-REVERSE CHARACTERISTICS

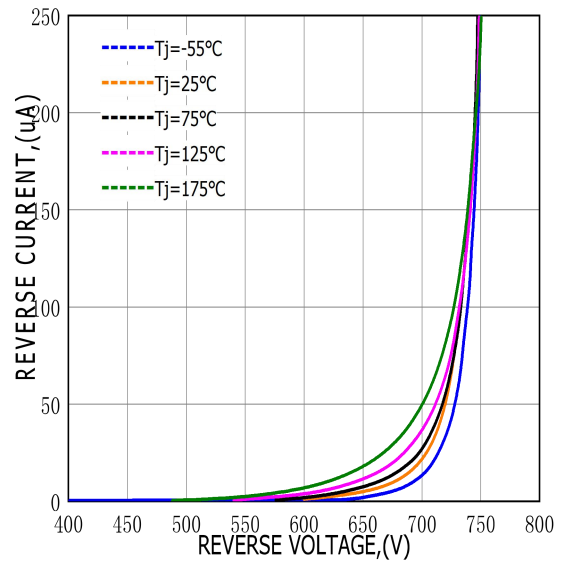


FIG.3-TOTAL CAPACITANCE CHARGE VS REVERSE VOLTAGE



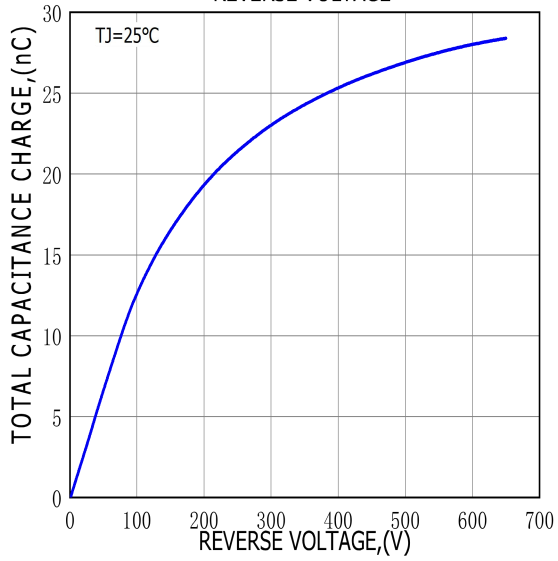


FIG.4-CAPACITANCE VS REVERSE VOLTAGE

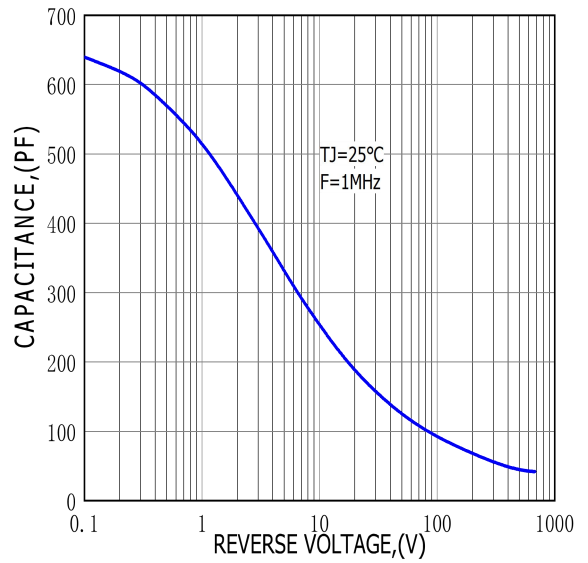


# DFN8x8 PACKAGE OUTLINE

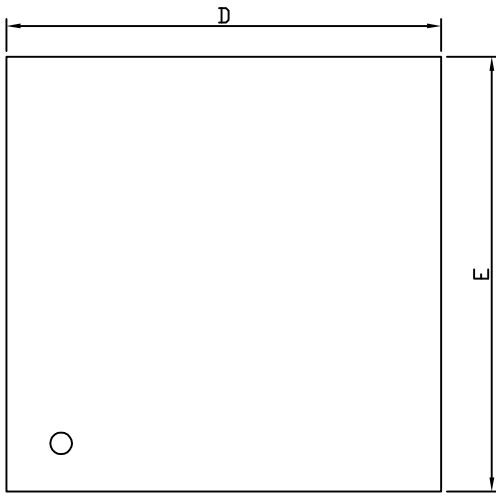


TOP VIEW




SIDE VIEW

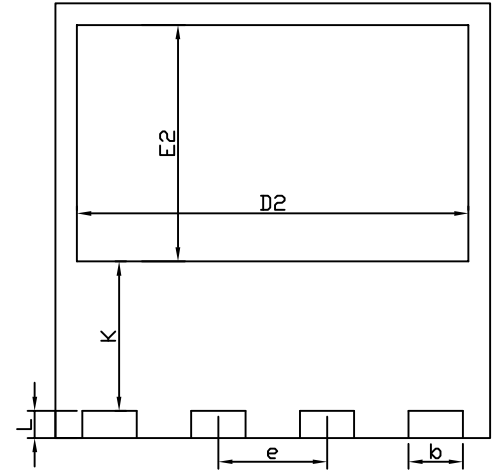

BOTTOM VIEW

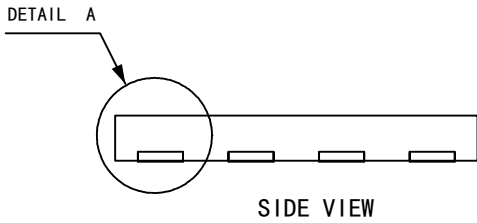


SIDE VIEW

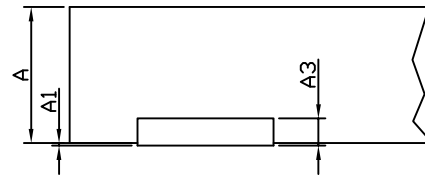

DETAIL A

## RECOMMENDED LAND PATTERN

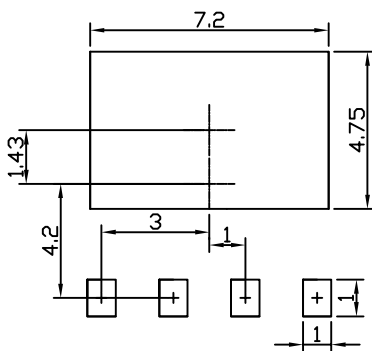

UNIT: mm

	MIN	NOM	MAX
A	0.90	1.00	1.10
A1	0.00	0.02	0.05
A3		0.20	
b	0.90	1.00	1.10
D	7.90	8.00	8.10
E	7.90	8.00	8.10
D2	7.10	7.20	7.30
E2	4.25	4.35	4.45
e	1.90	2.00	2.10
K	2.65	2.75	2.85
L	0.40	0.50	0.60